

FREQUENCY SCANS AND RESONANCE MODE ANALYSIS FOR RESONANCE PROBLEMS IDENTIFICATION IN POWER NETWORKS IN PRESENCE OF HARMONIC POLLUTION

Loïc EGGENSCHWILER
HES-SO Fribourg - Switzerland
loic.eggenschwiler@hefr.ch

Olga GALLAND
HES-SO Fribourg - Switzerland
olga.galland@hefr.ch

Damien CHOLLET
Services Industriels de Lausanne - Switzerland
damien.chollet@lausanne.ch

Fabrice DECORVET
Services Industriels de Genève - Switzerland
fabric.decorvet@sig-ge.ch

Dominique ROGGO
HES-SO Valais – Switzerland
dominique.roggo@hevs.ch

Patrick FAVRE-PERROD
HES-SO Fribourg – Switzerland
patrick.favre-perrod@hefr.ch

ABSTRACT

The understanding of harmonics propagation in power systems recently gained interest. In HV networks, the current trend of undergrounding is modifying the network resonance frequencies. In LV distribution systems, the increasing deployment of decentralized generation induces new harmonic pollution, which could interfere with power line communications (PLC).

In this analysis, the most important elements of power systems (overhead lines, underground cables, power transformers, linear loads and inverters) are modelled in frequency and integrated into Frequency scan and Resonance Mode Analysis methods. Two network types are analysed to point out the specificities of each network level: the first one is an EHV/HV network (380 kV, 220 kV, 125 kV and 50 kV) and the second one is a part of a MV/LV distribution system (20 kV and 400 V). With this method the network behaviour in a large frequency bandwidth (up to 5 kHz for transport grids and up to 200 kHz for the distribution system) can be predicted. Recent network impedance measurements contribute to the validation of this method by showing the same trends and resonance frequencies close to the ones visible in the simulation results.

I. INTRODUCTION

With the increased use of power electronics, DSOs are facing the increasing significance of a known issue: harmonic pollution. Due to its switching nature, each power electronic converter injects harmonics into the network. In HV power systems, harmonics e.g. are produced by FACTS and HVDC converters as well as magnetic components. The combination of harmonics and resonances at the same frequencies can lead to equipment damages due to overvoltages, losses and interferences with communication systems [1]. In LV distribution systems, decentralized generation (DG) could imply interferences between produced harmonics and PLC [2]. All these increasing risks contribute to the DSOs interest in this research field. Indeed, harmonic sources are now well identified, but for some DSOs, the difficulties in

measuring the harmonics' propagation in networks imply that the link between these harmonics, network resonances and their potential effects is uncertain in many practical cases. Furthermore, the coupling of network levels with transformers permits resonances to "propagate" from one network level to another [3], and this phenomenon increases the resonance analysis study's complexity.

In the transmission system e.g., resonances have already been experienced. Active filters have been considered as a mitigation measure. The consequence of this problem was malfunctioning of the ripple control used for public lighting. In HV subtransmission systems, the trend to increasingly undergrounded networks is expected to change the resonance frequencies since undergrounded (UG) cables are more capacitive than overhead (OH) lines [3]. In distribution systems, smart grid devices like smart meters, which use PLC to communicate, are more prone to interference in cases where there is a high penetration of decentralized generation. Hence, methods and tools to simulate and predict the network harmonic behaviour are needed at every network voltage level. The method used here to analyse the network is composed of the three following steps:

- First, all the influent network elements are modelled in the frequency domain.
- Then, the network admittance matrix, which takes the studied network topology into account, is built for each frequency of the band of interest.
- Finally, the frequency scan method [4] is used to identify resonances (at which node and around which frequency) and the Resonance Mode Analysis (RMA) [5]-[7] gives the information about resonances origins.

In this paper, two typical networks are analysed in the frequency domain, one representing the HV subtransmission networks and the other one illustrating the MV and LV distribution networks. Both these typical networks are described in section II. The used elements models are briefly explained in section III, and the analysis methods applied to these models are discussed in section IV. The simulation results are discussed in section V and the applicability of the analysis method is discussed in section VI.

II. APPLICATIONS

HV subtransmission system

The first network analysed here is the typical HV subtransmission system of *Services industriels de Lausanne* (SIL). This Swiss DSO plans to change its current operational topology shown in Fig. 1 to the one of Fig. 2 in the future, essentially by increasing its undergrounding.

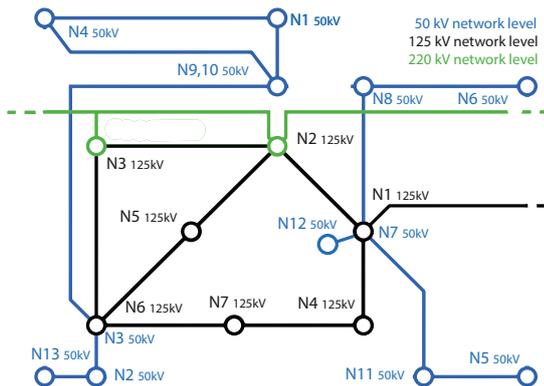


Fig. 1: SIL current operational topology

This change of topology could imply some modifications on its harmonic behavior. If the frequency of one of its resonances exactly matches a harmonic current injected by an existing power electronic device, the resulting interaction could cause damages in the network or cause outages. The same phenomenon could happen if one of these resonances occurs at the carrier frequency of the centralized control.

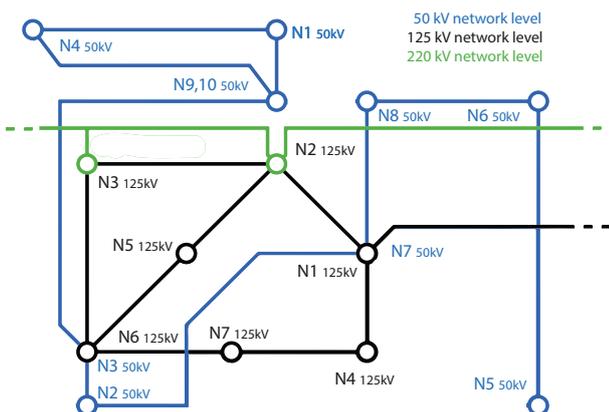


Fig. 2: SIL future operational topology

The network impedance model in the frequency domain gives useful information about which frequencies are sensitive and at which any current injection must be absolutely avoided. The upstream network levels have also been considered and modelled in this study. The system boundaries are placed on the Swiss part of the power system, as shown in TABLE I.

TABLE I : SIL STUDY CONSIDERED SYSTEM BOUNDARIES

Description	Voltage	Nodes	Lines
Transmission system	380 kV	33	49
	18 transformers	380/220 kV	
	220 kV	131	196
Subtransmission system	8 transformers	220/125 kV	
	125kV	42	60
	4 transformers	125/50 kV	
	50 kV	13	16

LV distribution system

The frequency scan method used in this work has also been applied to a representative distribution system of another DSO, *Services industriels de Genève* (SIG). The area of interest, exposed in Fig. 3, is limited to the MV lines (from the HV/MV transformation station), the MV/LV transformation station, as well as two of the eight transformer departures. The MV part (18 kV) is composed of OH lines and UG cables and the LV part (400V) is only built with UG cables. The MV/LV transformer is a Dyn oil-type transformer with a rated power of 630 kVA. Ten linear loads are modelled to emulate the houses behaviour and influence on the network impedance.

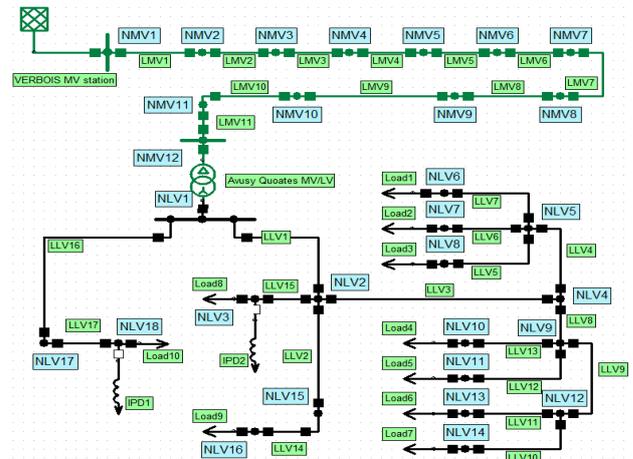


Fig. 3: SIG distribution network

This distribution network has been chosen as the object of this study because its DG penetration is high and because low data transfer rates in the PLC were observed between the smart grid equipment installed at MV/LV station and at the coupling point of DG. Since this equipment uses frequencies of 63 kHz and 73 kHz for its communication carrier signal and previous measurements had shown high harmonic currents (THD > 500 %) up to 70 kHz, the cause of the low rate of transmitted data could be interferences with the harmonic pollution. A better knowledge of the network impedances is then required to understand these phenomena.

III. MODELING

HV overhead lines and underground cables

HV power lines are modelled on the basis of their physical and geometrical characteristics, using the models proposed in [8]. These models are used for OH lines and UG cables with rated voltages of 20 kV, 125 kV, 220 kV and 380 kV. The geometrical parameters required to model these elements are exposed in Fig. 4 and Fig. 5 for UG cables and OH lines, respectively.

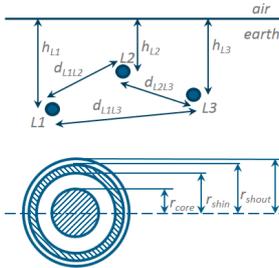


Fig. 4: HV power cables geometry

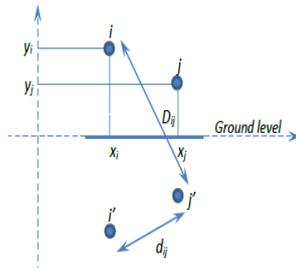


Fig. 5: HV overhead lines geometry

LV underground cables

A significant part of the LV lines is underground and thus only the UG power cable models are needed in this work. The typical geometry of LV power cables is shown in Fig. 6.

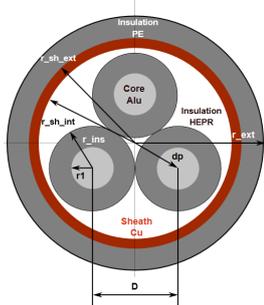


Fig. 6: LV power cables geometry

The resulting model, with all the considered phenomena, is exposed in Fig. 7.

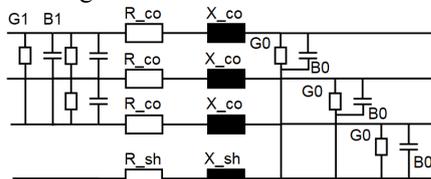


Fig. 7: LV power cable resulting model

The core inductance X_{co} , the core resistance R_{co} (considering the skin effect), as well as the core-to-core capacity C_l , are determined using formulae developed in [9]. To calculate the core-to-sheath capacity C_0 , a well-known formula is given in [10]. It is used to determine the conductance G_0 and the susceptance B_0 . The sheath impedance (R_{sh} and X_{sh}) depends only on the sheath internal and external radius $r_{sh,in}$ and $r_{sh,out}$ [11]. When all

these elements are determined, the same method as for HV power cables [8] is used to integrate LV power cables in an admittance matrix form.

Power transformers

The inductive equivalent model, widely used and accurate enough to emulate transformers behaviour at the industrial frequency (50Hz / 60 Hz), is not suitable when the analysis frequency bandwidth is increased up to a few kilohertz. In distribution systems, studies focussed on PLC interactions have to consider frequencies in the CENELEC band A (up to 95 kHz). At such frequencies, stray capacitances of the transformer have a significant effect. The grey-box transformer model gives a good estimation of a specific transformer's behaviour, without the need to measure it. Each winding, as well as the magnetizing branch, is represented by RLC circuits. A capacitive impedance is considered between both the sides and between the HV-side and the earth. The lumped equivalent circuit from [12] is shown in Fig. 8.

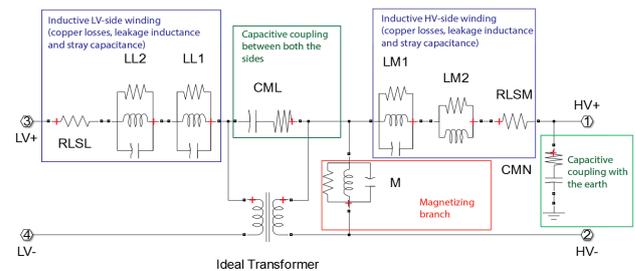


Fig. 8: Lumped equivalent circuit of the transformer grey-box model used in the frequency domain

To obtain a three-phase transformer model, three lumped equivalent circuits are connected according to the transformer coupling (YNyn, Dyn, YNd, ...).

Distribution loads

Three possible load models have been used in this work: series RL, parallel RL and the CIGRE model [13]. These models, exposed in Fig. 9, can be expressed depending on their rated voltage V , the active and reactive power P and Q , and the harmonic order h .

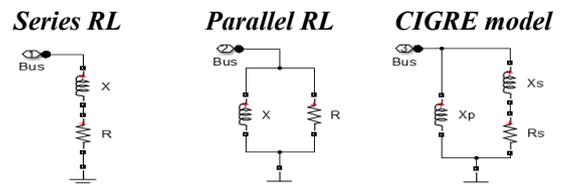


Fig. 9: Three possible linear load models

$$R = P \frac{V^2}{P^2 + Q^2} \quad R = \frac{V^2}{P} \quad R_s = \frac{V^2}{P}$$

$$X = h \cdot Q \frac{V^2}{P^2 + Q^2} \quad X = h \cdot \frac{V^2}{Q} \quad X_s = h \cdot 0.073 \cdot R_s$$

$$X_p = \frac{h \cdot R_s}{6.7 \frac{Q}{P} - 0.74}$$

Power electronics

Classical power electronic devices, such as standard inverters used to inject DG into the power system, can be modelled as a current source with a shunt admittance. This method permits to evaluate the influence of its admittance on the network and the harmonic pollution injected by a given type of inverter. In the considered equivalent network exposed in Fig. 10, the current source i_{INV} is the desired source at industrial frequency (50 Hz or 60 Hz) and another current source i_{Harm} represents the injected harmonic pollution. An existing method [14] to consider the inverter control loop in the shunt admittance Y_{INV} determination has been used here.

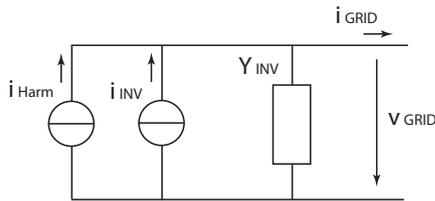


Fig. 10: Equivalent circuit of a DG inverter

IV. METHODS

As stated above, based on its geometry each network component admittance is determined and the admittance matrix Y_{BUS} is built for each frequency inside the bandwidth of interest.

Frequency scan

The frequency scan yields the nodal frequency response. In other words, this is the nodal impedance equivalent to the corresponding nodal impedance matrix diagonal element [4].

Resonance mode analysis

The resonance mode analysis (RMA), based on Eigenanalysis, unlike the frequency scan determines impedances in the modal coordinate system. The nodal impedance matrix transformation into the modal impedance matrix is described in [5]-[7].

This method allows to analyse the global network resonance response by indicating the network critical mode at each studied frequency. The RMA provides valuable information on participation factors at each critical mode. Using participation factors the nodes contribution to a given resonance mode can be obtained and the resonance "origin" can be identified. The RMA permits to illustrate changes in resonance behaviour of several network configurations or/and expansion networks.

V. SIMULATION RESULTS

HV subtransmission system of SIL

The frequency scan, as well as the RMA of this subtransmission system, have been analysed. The results

of the RMA, also called critical modes, represent the network global resonant behaviour. The comparison between the critical mode of the current and the future operational topologies, exposed in Fig. 11, highlights the frequencies where there is a significant difference, located around 1'500 Hz.

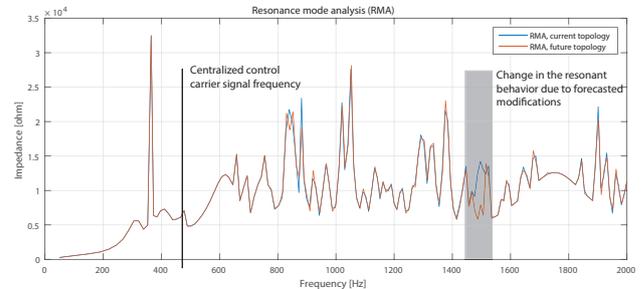


Fig. 11: SIL changes influence on the network critical mode

First, these results show that the changes in the network resonance, implied by the changes of topology, will not affect the centralized ripple control (at 475 Hz) in the future. Secondly, most of the nodes with the highest contribution to the resonant behaviour are identified for each resonance of the critical mode. When the 50 kV level only is analysed, six resonance peaks are found on the frequency scan. The five highest participation factors (PF) of each peak are reported in TABLE 2. These PF inform about which nodes are "the most responsible" of a resonance peak. The only peak influenced by nodes in the 50 kV level is the resonance peak 5 (around 1'519 Hz). It is therefore coherent that the resonant behaviour is only influenced around this frequency when a change of topology happens in the 50 kV network level.

TABLE 2 : FIVE MOST IMPORTANT PARTICIPATION FACTORS (PF OF THE SIX LOCATED RESONANCE PEAKS

Peak 1, @ 1294 Hz Level: 220 kV		Peak 2, @ 1333 Hz Level: 220 kV		Peak 3, @ 1371Hz Level: 220 kV	
Node	PF	Node	PF	Node	PF
81	0.07	87	0.31	21	0.14
42	0.05	113	0.09	63	0.12
100	0.05	114	0.07	101	0.03
Peak 4, @ 1445 Hz Level: 220 kV		Peak 5, @ 1519 Hz Level: 50 kV		Peak 6, @ 1593 Hz Level: 220 kV	
Node	PF	Node	PF	Node	PF
110	0.12	7	0.09	81	0.09
36	0.02	6	0.09	42	0.05
47	0.02	9	0.09	100	0.05

LV distribution system of SIG

The simulation results of the studied typical distribution network area illustrate two interesting phenomena: the adding of an inverter tends to induce a new resonance, and this new resonance is visible at frequencies lower than its switching frequency at 15 kHz (cf. Fig. 12).

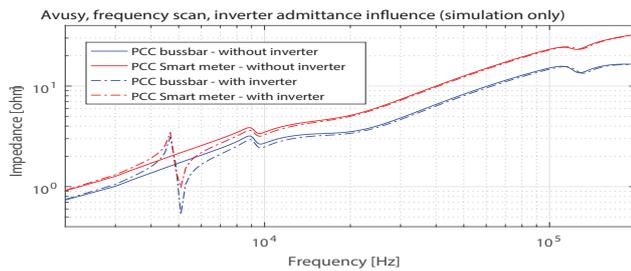


Fig. 12: Inverter influence on the network impedance

In a related project a measurement device is developed with a large frequency bandwidth (2 kHz to 200 kHz). This device, described in [15], was used to measure the impedance of the same real network. The comparison between these measurements and the simulation results are shown in Fig. 13 for two important nodes of the network: the first one is on the LV side of the distribution transformer and the second one is 42m further, in a house where smart meters using PLC and PV inverters are located.

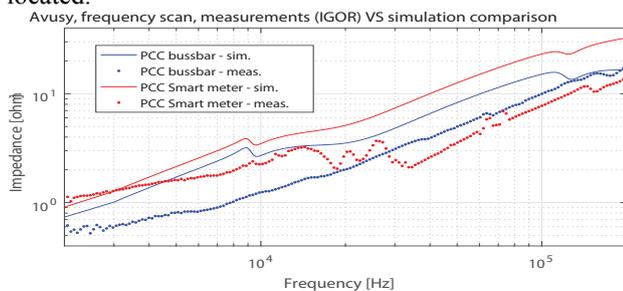


Fig. 13: Total network impedance measurements

The shape of both measured and calculated curves is similar. The first cause of difference could be the boundaries of the modelled system (measurements are done on all the system) and the second cause could be the measurement device range of accuracy. The causes of these differences include measurement errors and modelling inaccuracies. Influence of unknown loads and sources connected to the same LV feeder have not been considered in the simulation model. This equipment could be the source for the impedance variations measured in the 15 to 40 kHz range. However, the network resonances are visible for both measurements and simulation results in the same range of frequencies.

VI. CONCLUSION

Network resonances have been identified in systems by both measurement and simulation. Issues implied by the integration of renewable energy production are highlighted: on one hand, each inverter introduces harmonic currents and on the other hand this inverter could induce resonances in the network impedance. Based on recent experience, it is important to understand these effects in order to maintain the functionality of PLC and ripple control systems. The modelling framework summarised and applied in this paper will help the DSOs to do so early in the planning process.

REFERENCES

- [1] K. Temma, F. Ishiguro, N. Toki, I. Iyoda and J. J. Paserba, 2005, "Clarification and measurements of high frequency harmonic resonance by a voltage sourced converter," *IEEE Trans. Power Delivery*, vol. 20, pp. 450-457
- [2] E. O. A. Larsson, M. H. J. Bollen, M. G. Wahlberg, C. M. Lundmark and S. K. Ronnberg, 2010, "Measurements of High-Frequency (2–150 kHz) Distortion in Low-Voltage Networks," *IEEE Trans. Power Delivery*, vol. 25, pp. 1749-1757
- [3] O. Galland, D. Leu, V. Berner, P. Favre-Perrod, 2015, "Resonance Analysis of a Transmission Power System and Possible Consequences of its Undergrounding", *DEMSEE'15*.
- [4] J. C. Das, 2012, "Power System Analysis: Short-Circuit Load Flow and Harmonics," 2nd Ed, CRC Press, Taylor & Francis Group, New York
- [5] W. Xu, Z. Huang, Y. Cui and H. Wang, 2005, "Harmonic resonance mode analysis," *IEEE Trans. Power Delivery*, vol. 20, pp. 1182-1190.
- [6] Y. Cui and W. Xu, 2007, "Harmonic resonance mode analysis using real symmetrical nodal matrices," *IEEE Trans. Power Delivery*, vol. 22, pp. 1989-1990.
- [7] Y. Cui and X. Wang, 2012, "Modal frequency sensitivity for power system harmonic resonance analysis," *IEEE Trans. Power Delivery*, vol. 27, pp. 1010-1017.
- [8] R. A. Rivas, 2001, «Section 9: Overhead Transmission Lines and Underground Cables» in *Handbook of Electric Power Calculations, Third Edition*, The McGraw-Hill Companies, New York, pp. 9.1 - 9.33.
- [9] N. Idir, Y. Weens and J. J. Franchaud, 2009, "Skin effect and dielectric loss models of power cables", in *IEEE Transactions on Dielectrics and Electrical Insulation*, vol. 16, pp. 147-154
- [10] K. Küpfmüller, W. Mathis, A. Reibiger, 2005, *Theoretische Elektrotechnik*, 16th Edition, Springer-Verlag Berlin Heidelberg, Berlin
- [11] C. Andrieu, E. Dauphant and D. Boss, 1999, «A frequency-dependent model for a MV/LV Transformer», *International Conference on Power Systems Transients*, Budapest, Hungary
- [12] C. J. Kikkert, 2012, "A PLC frequency model of 3 phase power distribution transformers," *SmartGridComm, International Conference on*, Tainan, pp. 205-210.
- [13] R. Burch *et al.*, 2003, "Impact of aggregate linear load modeling on harmonic analysis: a comparison of common practice and analytical models," *IEEE Trans. on Power Delivery*, vol. 18, pp. 625-630.
- [14] S. Wasterlain, H. Parisod, D. Roggo and M. Carpita, 2016, "EMC studies on grid integration of Distributed Energy Resources. A 10 kW, IEC-61850 compliant inverter design and preliminary test results," *SPEEDAM*, pp. 1059-1066
- [15] D. Roggo, L. Merendaz and D. Furrer, 2013, "On-line 2 to 150 kHz grid impedance meter," *CIRED 2013*, Stockholm, pp. 1-4.