

HIGH PERFORMANCE MAGNETIC SHIELDING SOLUTION FOR ELF SOURCES

Aldo CANOVA, Luca GIACCONE
Dipartimento Energia, Politecnico di Torino -Italy
aldo.canova@polito.it

ABSTRACT

In this paper some particular aspects related to open shields with high performance are presented. The magnetic flux density targets related to the protection of sensitive devices are quite low, less than 0.2 μT . The problem to reach high magnetic field attenuation is more complicated by the fact that open shields have to be adopted instead of closed solutions. After some general considerations about open shields two practical examples are presented and discussed.

INTRODUCTION

Often the need of very low environmental magnetic flux density, as in the case of laboratories where high sensitive devices are installed (e.g. electronic microscopes), requires a suitable design of magnetic shielding systems able to reach high attenuation factors. In particular, when the laboratories are close to ELF sources (usually 50 or 60 Hz) the magnetic shield has to provide a global field reduction from some μT up to 0.1 or 0.2 μT [1].

Besides the restriction on magnetic field close to sensitive devices there are in several country and especially in Europe some binding limits also for population aimed to prevent possible long term effects [2]. A recent example is the restriction to magnetic field at low frequency introduced in France since 2013. The “Ministère de l’Ecologie du Développement Durable et de l’Energie” has published indications regarding the maximum level of magnetic flux density in sensitive area as hospitals, maternity, nurseries, kindergartens, primary schools, etc.. Such value, expressed as an average over 24 hours, is 0.4 μT . In order to satisfy this limit a distance of compliance (“bordure de zone de prudence”) associated to 1 μT must be guaranteed for new plant installations as overhead and buried cable, substation, etc.

Sometimes active and/or passive shields can work separately or together to better fit the mitigation requirements [3-4]. Moreover, regarding passive solutions, the shield of the clean room and the shield of the different sources can be adopted at the same time in order to obtain higher magnetic attenuation.

This paper analyzes the case of open shields with high performance in terms of magnetic field attenuation. After some general considerations about open shield design two actual cases are reported and discussed.

OPEN SHIELD CONSIDERATION

Dealing with power plants which are usually constituted by power transformers, connections and switch gear boxes, different passive shielding solutions can be adopted. Commonly, the shield can be localized close to the source inside the substation or close to the victims: devices or people [5]. In both cases, especially when the shield is installed in a building already built, the shield is not closed completely around the source or the victim but is an open shield that leaves free openings as windows or doors.

Usually open shields are fixed on the separation walls between sources and victims inside the substation or inside the room to be protected. In both cases the shield present some flaps, of about 1 m, which provide a reduction of the edge effects. It is well known that both ferromagnetic and conductive shields are subject to edge effects that produce a local increase of the magnetic flux density.

The performance of a shield is usually expressed by the ratio between the unshielded and the shielded magnetic field. This coefficient is called shielding factor (SF) and in the case of closed room is usually considered as unique number, often expressed in dB. For open shield this is not possible, the SF is pointwise function of the space which decay going far from the shield. Even if the shielding factor is very high close to the shield (higher than 100) a value of 5 times at some meter from the shield is very satisfactory.

The last important topics regarding open shields is related to the materials. Usually ferromagnetic shields are suggested in the case of shield very close to the victim while a conductive solution is convenient when the shield is closer to the source. A combination of the two materials makes it possible to reach a good mix of the attenuation principles of the two materials and good performances close and far from the shield [6].

APPLICATION CASES

Two actual applications are presented in this section. A quite high magnetic field attenuation is required in both cases, SF higher than 15 and up to 30. The shielding solution must be integrated in existing plants and buildings and a reduced impact to the operational activity in the two sites is required.

Case 1

The first case presented deals with the attenuation of magnetic fields generated by a big power transformer close

to a hospital laboratory. The magnetic flux density measured on the wall of the laboratory close to the substation was around $100 \mu\text{T}$ when the transformer works at 80% of the full load. The presence of people and electronic devices inside the laboratory requires a SF of about 30 close to the wall (at about 50 cm from the shield) in order to reach the target of $3 \mu\text{T}$ for people and $3.78 \mu\text{T}$ (3A/m) for electronic devices. The proposed solution is based on a local shielding system acting directly on the source and so installed inside the substation.

The shield is made of three layers using conductive and ferromagnetic material. The thickness of each layer is defined to get the required shielding factor and to minimize the weight. A self-supporting structure has been made in order to minimize the installation time: only 3 hours. Consequently, a very reduced out of service of the power transformer was required. Fig. 1 shows the shield of the transformer during the installation.



Fig. 1. Local shield for the power transformer

The simulated performance of the shield is reported in Fig. 2 where it is possible to see that in the protected area the value of $3 \mu\text{T}$ is guaranteed.

Finally, in fig. 3 is reported the measured SF which reach a value of 150 times close to the shield and 30 times at 50 cm from the shield, according to the problem requirements.

Case 2

The second example refers to the shielding of magnetic fields generated by a complex power substation on a test area where sensitive electronic devices are installed. Such devices are employed in a semiconductor industry for the wafer testing and very low electrical currents are measured (in the order of femto-Amperes). External magnetic fields have to be low enough in order to not disturb the current measurements.

Level of $0.2 - 0.3 \mu\text{T}$ are usually required in the environment where the testing machines are placed.

Fig. 4 shows the layout of the power substation which is

placed below the area where a new testing laboratory has to be installed (see red line in Fig., 4). The substation is composed by 8 power transformers of 2500 kVA each and the connections among the transformers and the low voltage switch gear boxes are obtained by busbar systems (blue drawings).

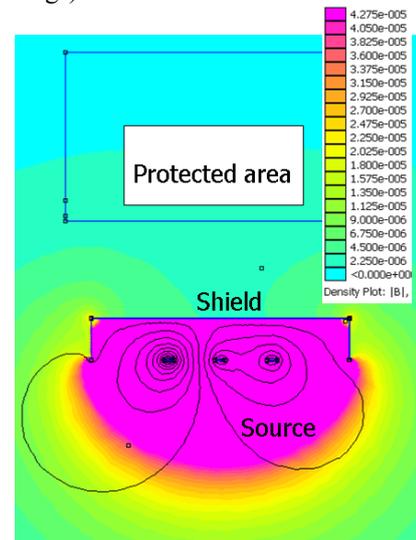


Fig. 2. Simulation of the magnetic flux density distribution in the presence of the shield

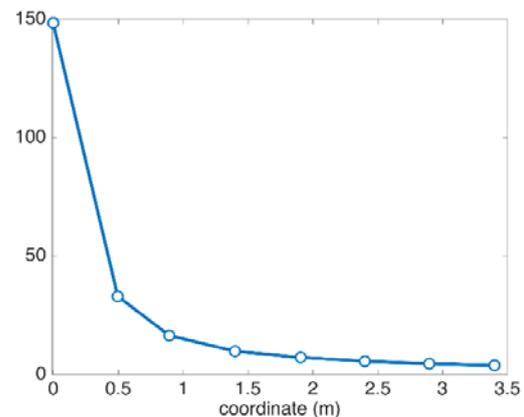


Fig. 3. Magnetic field attenuation at the quote of 1 m from the ground for different distance from the shield

Some preliminary measurements show a magnetic pollution in the testing close to $2-3 \mu\text{T}$. Such value is quite constant because the substation works 24 hours a day at constant load. A shielding factor of at least 10 is required. Before starting with the design of the shield the complete model of the substation has to be created. The model is made by a commercial software [7], takes into account the different sources and the layout of the substation (Fig. 5). The simulation of the magnetic flux density at the ground level of the testing area is reported in Fig. 6. According to the measurement, the maximum value calculated is equal to $3 \mu\text{T}$. The chosen shielding shape is presented in Fig. 7 where only a portion of the area above the substation is

shielded (bleu area). The shielding is composed by multilayer plates made of conductive and ferromagnetic materials. The shield can also be observed in Fig. 8 where it is modelled using an integral formulation [8-9].

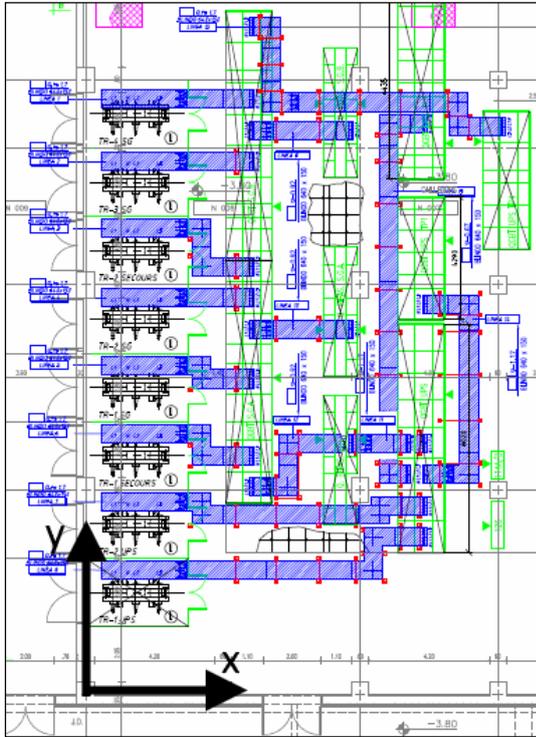


Fig. 4. Layout of power substation and the indication of the above testing area

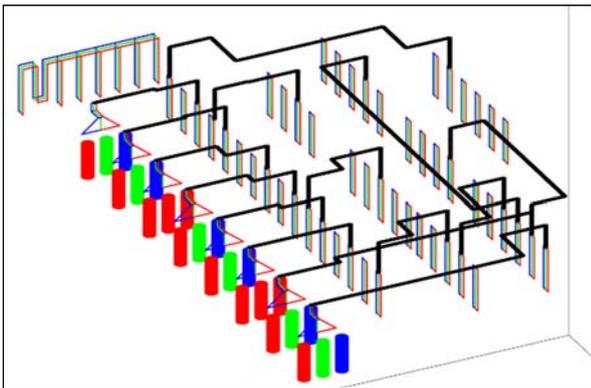


Fig. 5. 3D Model of the power substation: transformers and power lines.

The shield simulation makes it possible to obtain above the substation a significant reduction of the magnetic field, even if in some area, close to the shielding boundary, the limit is exceeded (Fig. 9). This is due to the edge effects produced by the shield and the only solution, which was not allowed in the presented application, is the extension of the shield outside the sensitive area.

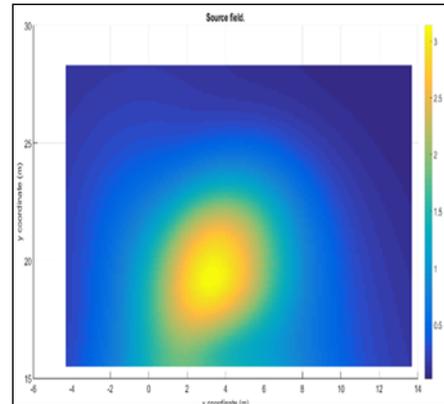


Fig. 6. Simulated magnetic flux density distribution in the testing area.

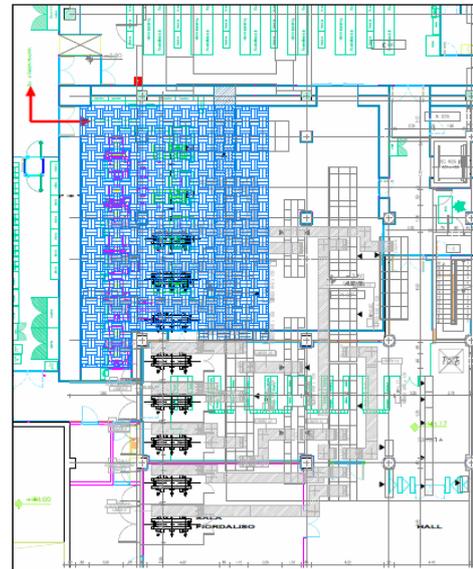


Fig. 7. Indication of the shielded area.

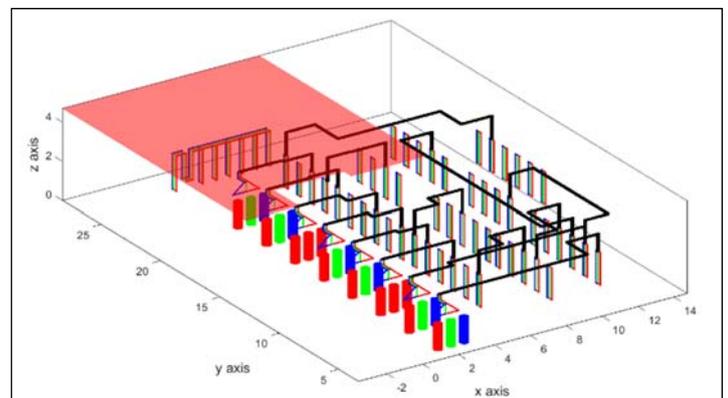


Fig. 8. 3D Model of the substation in presence of the shield.

An alternative solution based on the application of an additional shield placed on the top of each power

transformer has been applied (Fig. 10). A new simulation with the two shields (red and green plane in Fig. 11) is performed and the final magnetic field distribution is shown in Fig. 12. As it can be seen the magnetic flux density globally does not overcome the limit of $0.2 \mu\text{T}$.

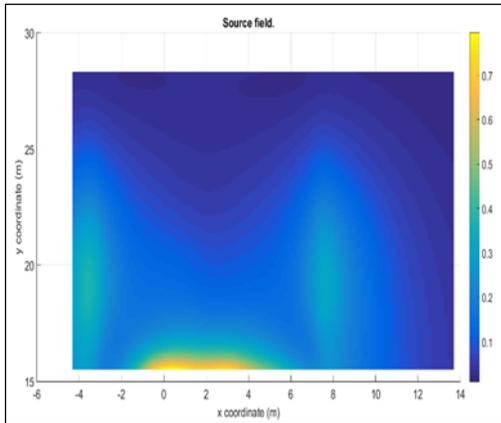


Fig. 9. Simulated magnetic flux density distribution in the testing area with the shield.

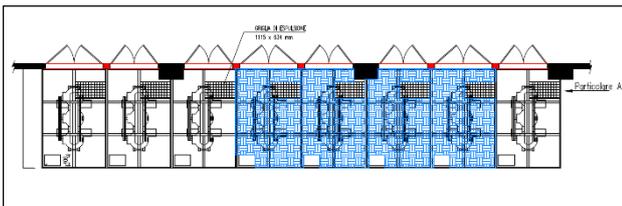


Fig. 10. Second shielding system directly above the transformers.

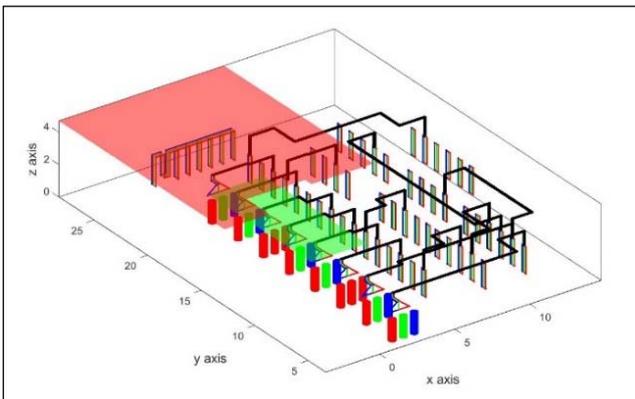


Fig. 11 3D Model of the substation in presence of the two shields.

Experimental results

After the simulation and design step the implementation of the shielding solution has been done. Fig. 13 shows the installation of the shield at the ground level of the testing area. Fig. 14 shows the shield placed above the power transformer boxes. In both shields the aluminium sheets have been welded.

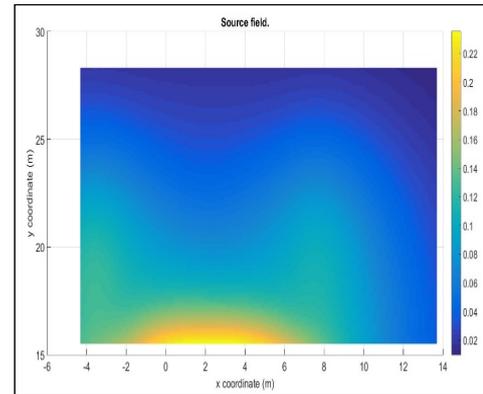


Fig. 12 Simulated magnetic flux density distribution in the testing area with the two shields.



Fig. 13. Picture of the first shield: under the floating floor of the testing area.



Fig. 14. Picture of the second shield: above the boxes of the power transformers.

The performance of the shielding system have been tested by experimental measurements performed at 9 points as shown in Fig 15. Three heights have been considered:

- $z = 70\text{cm}$, corresponding to the height where the floating floor of the clean room is installed and so it coincides with the actual floor surface;
- $z = 120\text{cm}$, corresponding to a height of 50cm from the floating floor of the clean room;
- $z = 170\text{cm}$, corresponding to a height of 100cm from the floating floor of the clean room.

The results of the entire measurements campaign are

summarized in the following tables. In particular Tab. 1 includes the magnetic flux density before the mitigation, Tab. 2 includes the values after the application of the first shielding and finally, Tab. 3 includes the values obtained with the installation of the second shield.

As it can be seen, all the measured values are quite in good agreement with the expected results from simulations.

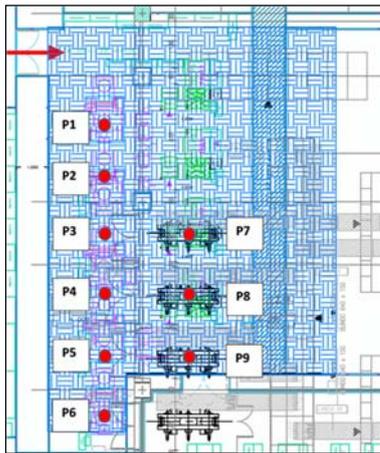


Fig. 15. Layout of the measurement points

Table 1 Magnetic flux densities without mitigation (P4, P5, P6 where not available for measurements during the campaign).

	B [μ T] Z = 70cm	B [μ T] Z = 120cm	B [μ T] Z = 170cm
P1	0,96	0,92	0,92
P2	1,23	1,18	1,17
P3	2,55	2,13	1,96
P4	--	--	--
P5	--	--	--
P6	--	--	--
P7	2,41	2,22	2,22
P8	2,63	2,32	2,17
P9	1,86	1,72	1,62

Table 2 Magnetic flux densities after the installation of the first shield.

	B [μ T] Z = 70cm	B [μ T] Z = 120cm	B [μ T] Z = 170cm
P1	0,09	0,10	0,11
P2	0,09	0,09	0,09
P3	0,10	0,13	0,14
P4	0,15	0,16	0,18
P5	0,42	0,37	0,35
P6	0,66	0,59	0,54
P7	0,23	0,22	0,22
P8	0,26	0,26	0,27
P9	0,98	0,72	0,62

Table 2 Magnetic flux densities after the installation of

the second shield.

	B [μ T] Z = 70cm	B [μ T] Z = 120cm	B [μ T] Z = 170cm
P1	0,19	0,18	0,18
P2	0,16	0,14	0,14
P3	0,16	0,15	0,15
P4	0,17	0,17	0,17
P5	0,27	0,25	0,24
P6	0,44	0,41	0,35
P7	0,23	0,22	0,21
P8	0,22	0,21	0,22
P9	0,51	0,37	0,34

Points where $B < 0,2 \mu T$
 Points where $0,2 \mu T < B < 0,4 \mu T$
 Points where $0,4 \mu T < B < 0,6 \mu T$
 Points where $0,6 \mu T < B < 0,8 \mu T$
 Points where $B > 0,8 \mu T$

CONCLUSIONS

In the paper the problem of high performance magnetic attenuation of sensitive areas with open shields is presented. After a brief description of crucial points regarding open shields a couple of applications are presented and discussed. The obtained results show the capability of open shields to get the required performance and some critical aspects can be found in practical situations.

REFERENCES

- [1] D. A. Muller and John Grazul, "Optimizing the environment for sub-0.2nm scanning transmission electron microscopy", Journal of Electron Microscopy, vol. 50(3), pp. 219-226, 2001.
- [2] S. Kandel, ELF policies worldwide – protection of general public, in: WHO Workshop, 2007 June.
- [3] D. Bavastro, A. Canova, F. Freschi, L. Giaccone, and M. Manca, "Magnetic field mitigation at power frequency: design principles and case studies," IEEE Trans. Ind. Appl., vol. 51, pp. 2009–2016, May 2015.
- [4] J. C. del-Pino-López, L. Giaccone, A. Canova, P. Cruz-Romero, Design of active loops for magnetic field mitigation in MV/LV substation surroundings, Electric Power Syst. Res. 119, 337–344, 2015.
- [5] Working group C4.204, Int. Council on Large Electric Systems (CIGRE'), Mitigation techniques of power frequency magnetic fields originated from electric power systems, Tech. Rep., 2009.
- [6] D. Bavastro, A. Canova, L. Giaccone, M. Manca, "Numerical and experimental development of multilayer magnetic shields", Electric Power Syst. Res. 116, 374–380, 2014.
- [7] MAGIC software: MAGnetic Induction Calculation (<http://www.satishielding.com/products-and-solutions/software-magic/>)
- [8] L. Giaccone, D. Ragusa, M. Khan, O. Manca, Fast magnetic field modeling for shielding systems, IEEE Trans. Magnet. 49 (7) (2013) 4128–4131.
- [9] F. Freschi, M. Repetto, A general framework for mixed structured/unstructured PEEC modelling, ACES J. 23 (3) (2008) 200–206.